


Single Tube

Single Tube can be used for either direct burial with thick walled microduct or direct install for overrides with thin walled microduct.

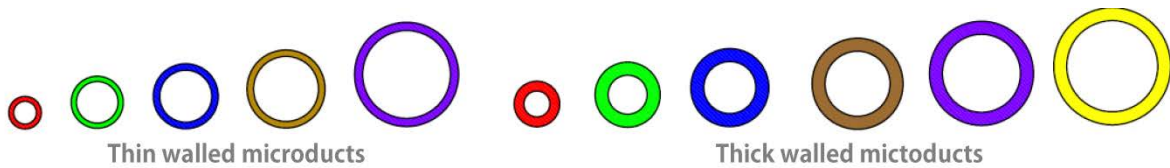

All Microduct has excellent blowing performance with a silicone coated inner tube.

Optional Features

- Wide range of size between 5/3.5mm and 20/16mm
- Ribbed & Smooth Type

Mechanical Performance Test compliance

Tensile Strength: IEC 60794-1-2 Method E1

Bend: IEC 60794-1-2 Method E11

Kink: IEC 60794-1-2 Method E10

Impact: IEC 60794-1-2 Method E4

Crush: IEC 60794-1-2 Method E3

Compliant to Telcordia GR 3155-CORE

Material

HDPE Inner tube

Marking

FT marking & Customized marking

Color

Tube color can be customized

Packing

2500', 5000', 6500' / Steel Reel